


Humbucker positioning

Configuration A



Configuration B

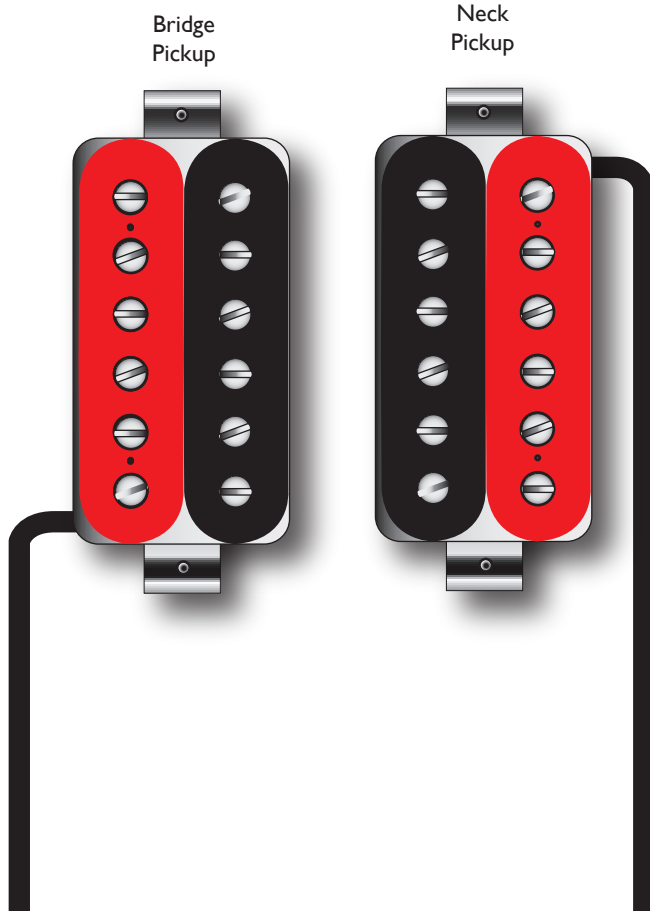

Notes

Red Coil = South
Black Coil = North

Hook-up cable always exits the baseplate below the south coil, except for when a reversed magnet is ordered

Configuration A is the traditional layout

Configuration B is used with a symmetrical neck pickup when a hum-cancelling effect is required between the inner coils or outer coils of both pickups



Bare Knuckle
PICKUPS