

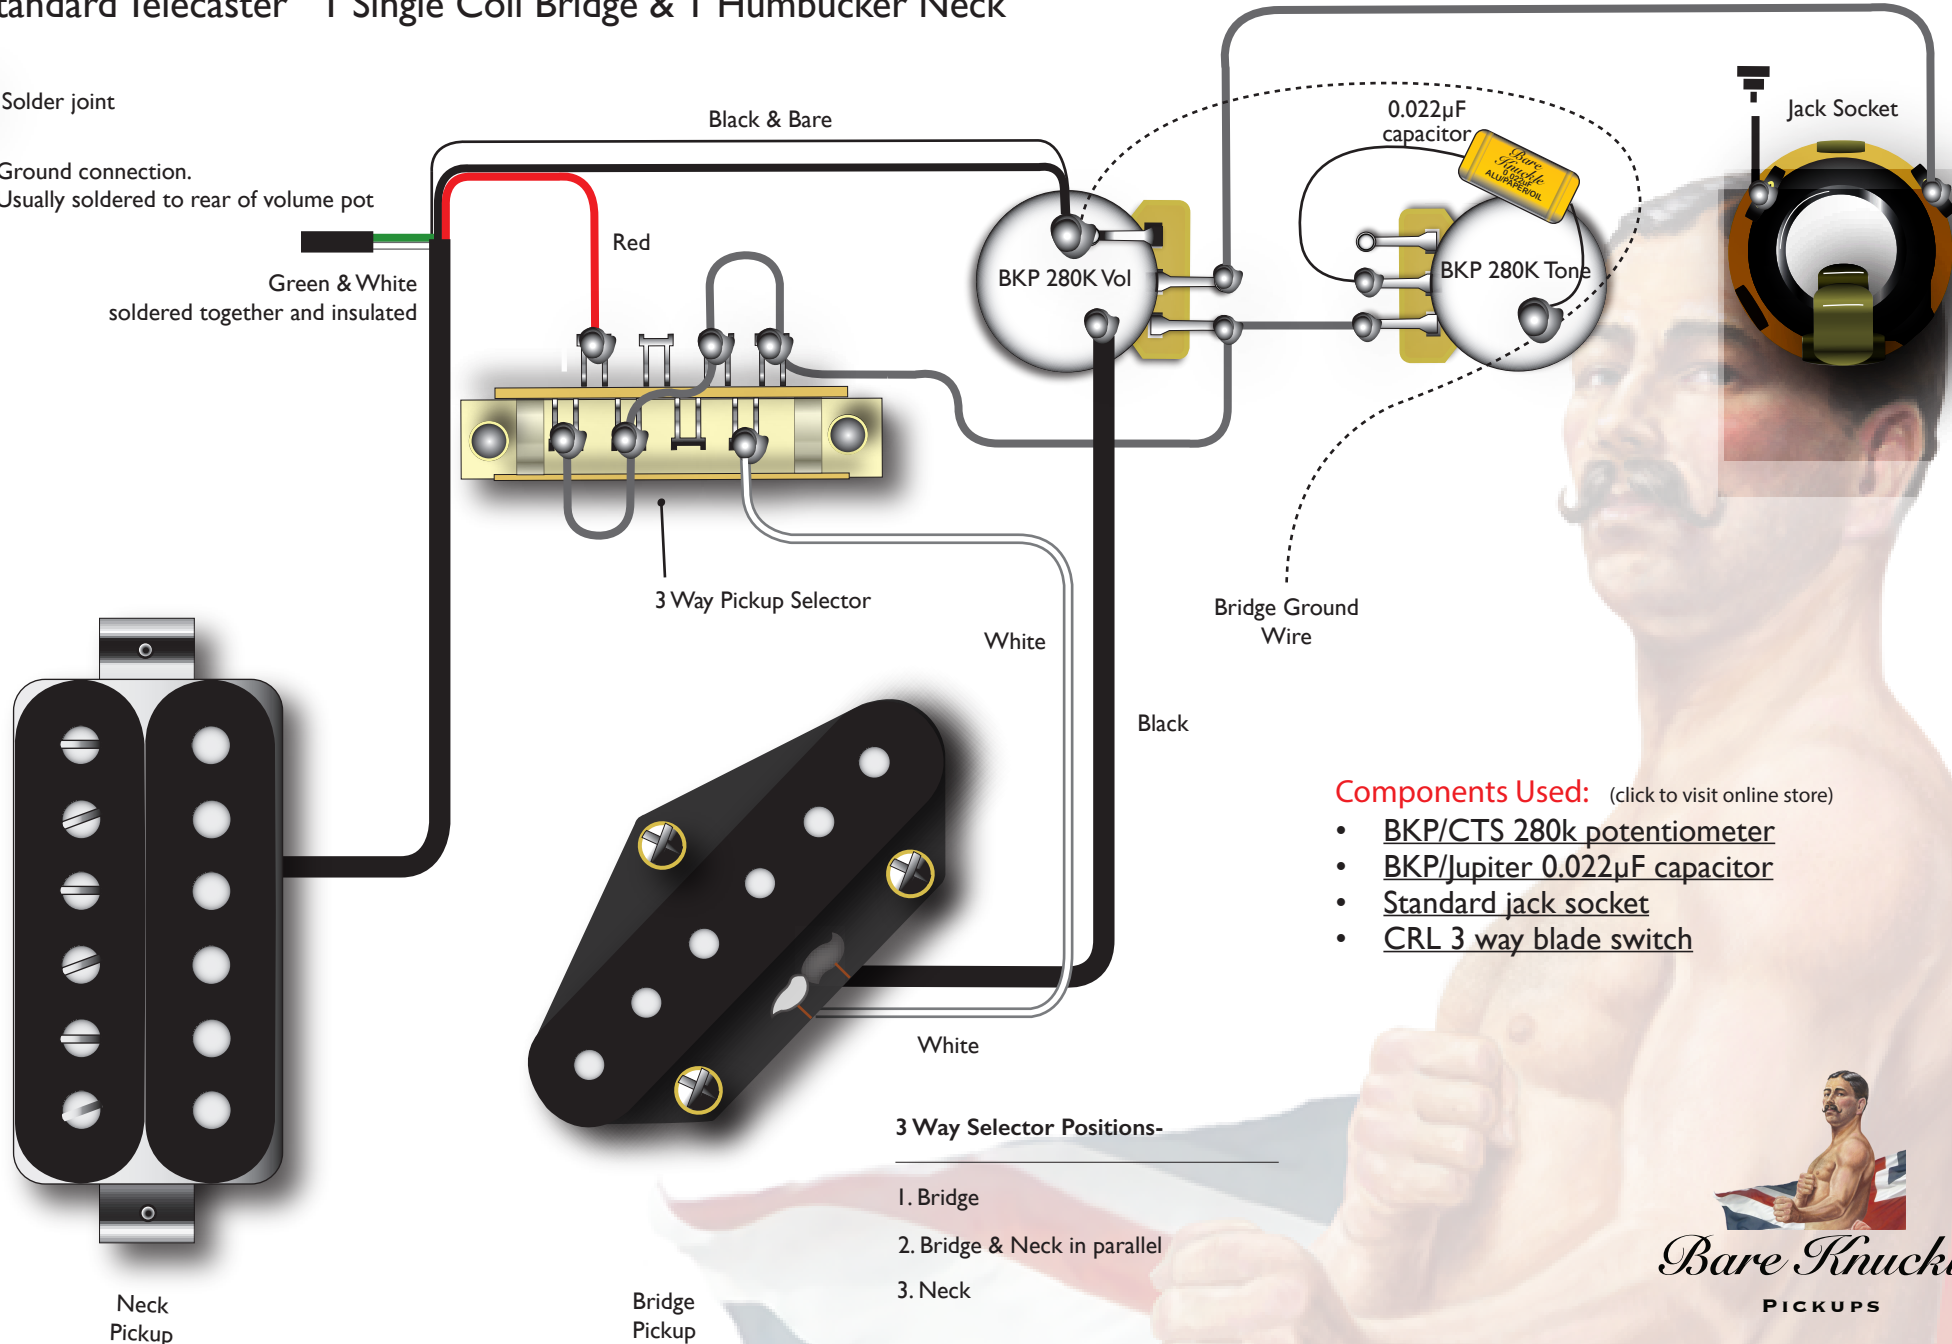


Standard Telecaster® | Single Coil Bridge & 1 Humbucker Neck

- Key
-  Solder joint
 -  Ground connection. Usually soldered to rear of volume pot



Components Used: [\(click to visit online store\)](#)

- [BKP/CTS 280k potentiometer](#)
- [BKP/Jupiter 0.022µF capacitor](#)
- [Standard jack socket](#)
- [CRL 3 way blade switch](#)

3 Way Selector Positions-

1. Bridge
2. Bridge & Neck in parallel
3. Neck



Bare Knuckle
PICKUPS