

## 2 Humbuckers, 4 Conductor - 1 Volume Pot With Push Pull Tone Pot Wired For Coil Split & 3 Way Blade Switch

Key






Solder joint



Ground connection.  
Usually soldered to rear of volume pot

### Close up of switch tags-

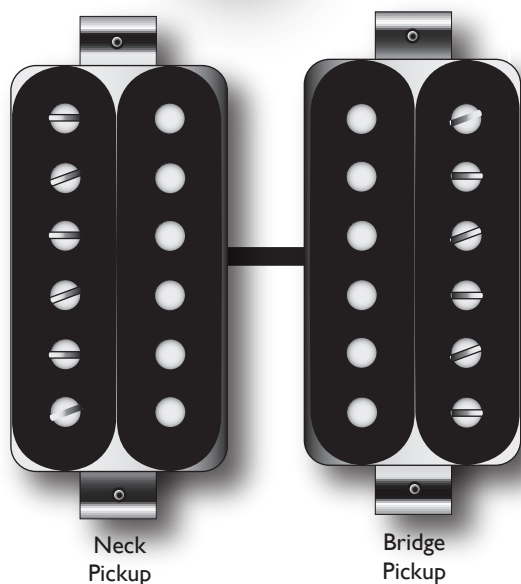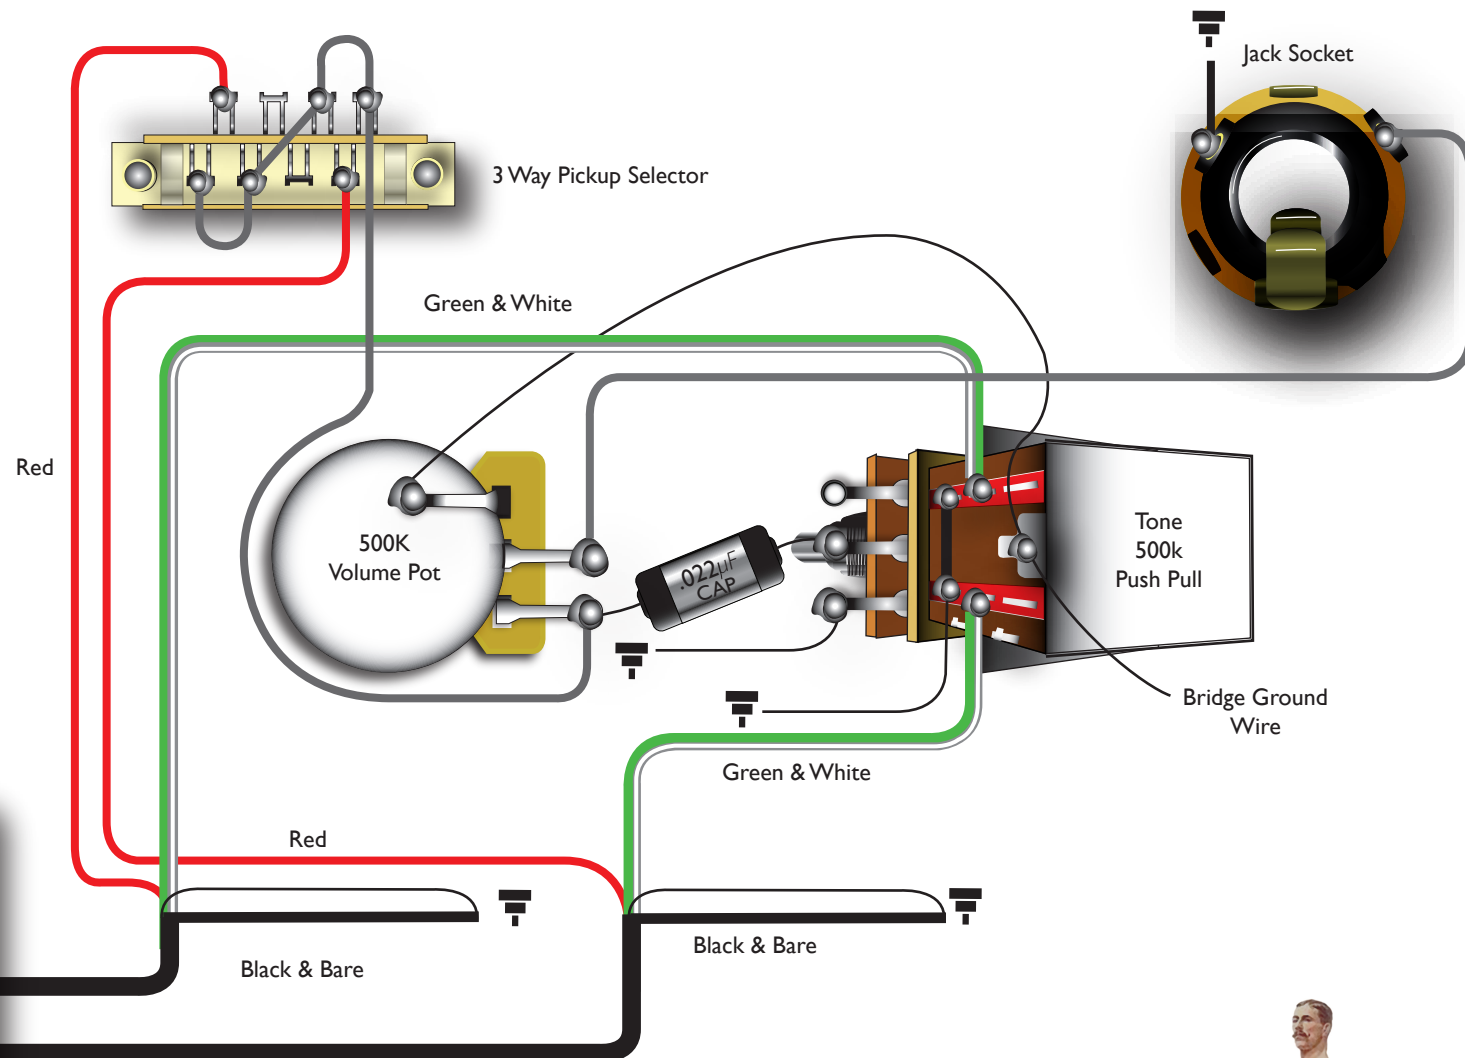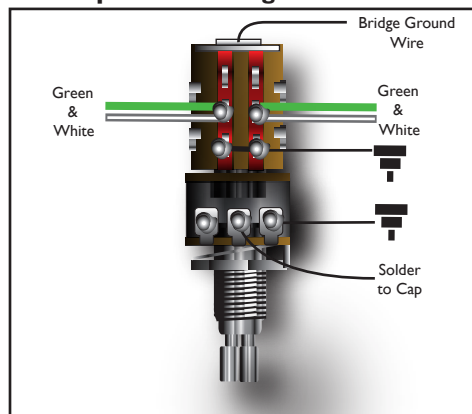


### Push Pull Positions-

1. Switch pulled out: slug coil only
2. Switch pushed in: both coils in series (standard humbucking operation)

### 3 Way Switch Positions-

1. Bridge
2. Bridge & Neck in Parallel
3. Neck

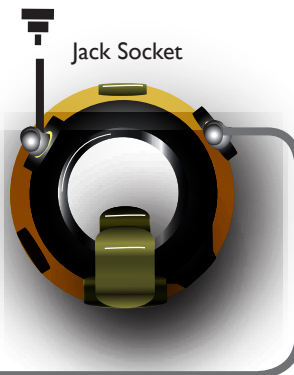

*Bare Knuckle*  
PICKUPS