

2 Humbuckers with 4 Conductor wired to original style PRS* 5 Way Rotary Switch

Key






Solder joint



Ground connection.
Usually soldered to rear of volume pot

Current style PRS* 5 Way-

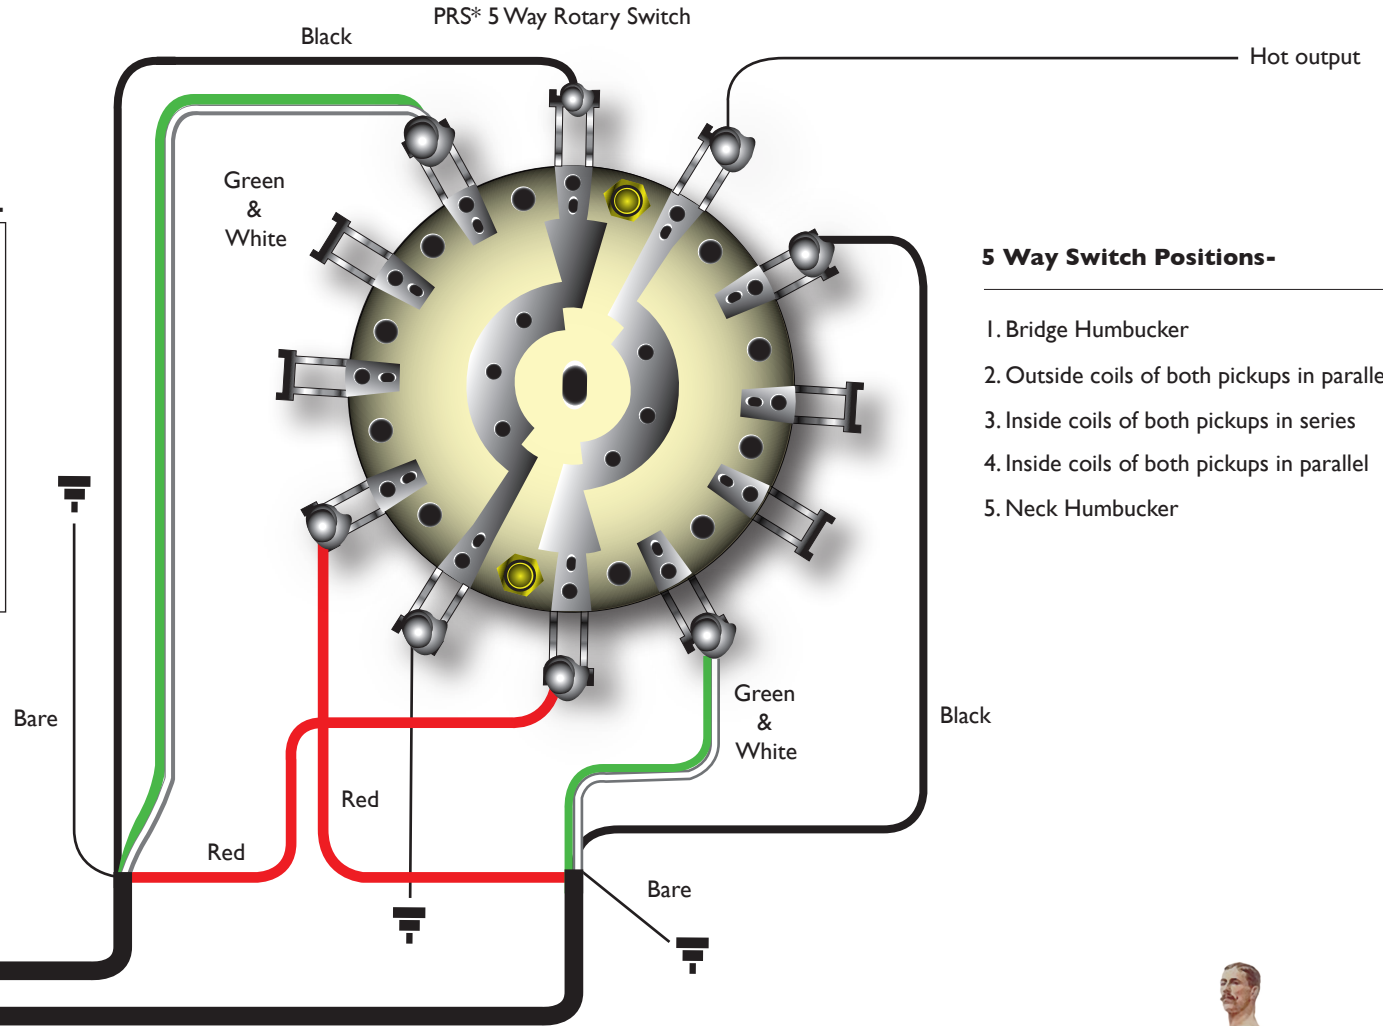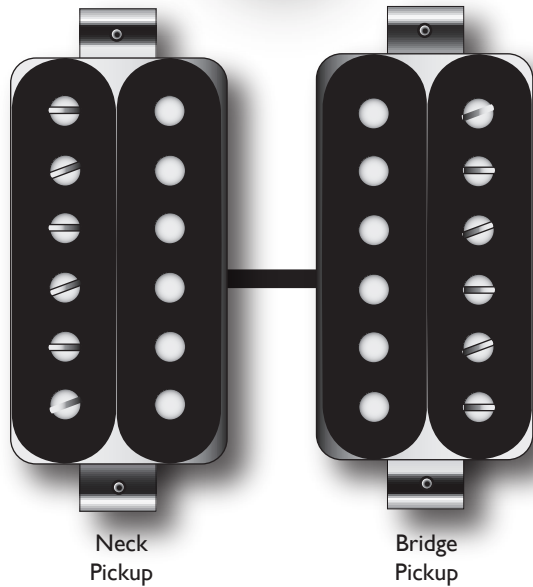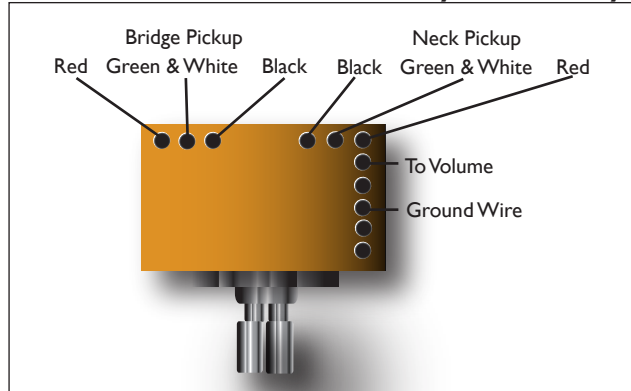

5 Way Switch Positions-

1. Bridge Humbucker
2. Outside coils of both pickups in parallel
3. Inside coils of both pickups in series
4. Inside coils of both pickups in parallel
5. Neck Humbucker

NB - Bridge Pickup magnet must be reversed for correct operation with this type of switching



Bare Knuckle
PICKUPS