


H/S/S - Using Boot Camp Series Singlecoils

Key

-  Solder joint
-  Ground connection. Usually soldered to rear of volume pot

Components Used: (click to visit online store)

- [BKP/CTS 550k potentiometer](#)
- [BKP/Jupiter 0.022µF capacitor](#)
- [Standard jack socket](#)
- [CRL 5 way blade switch](#)

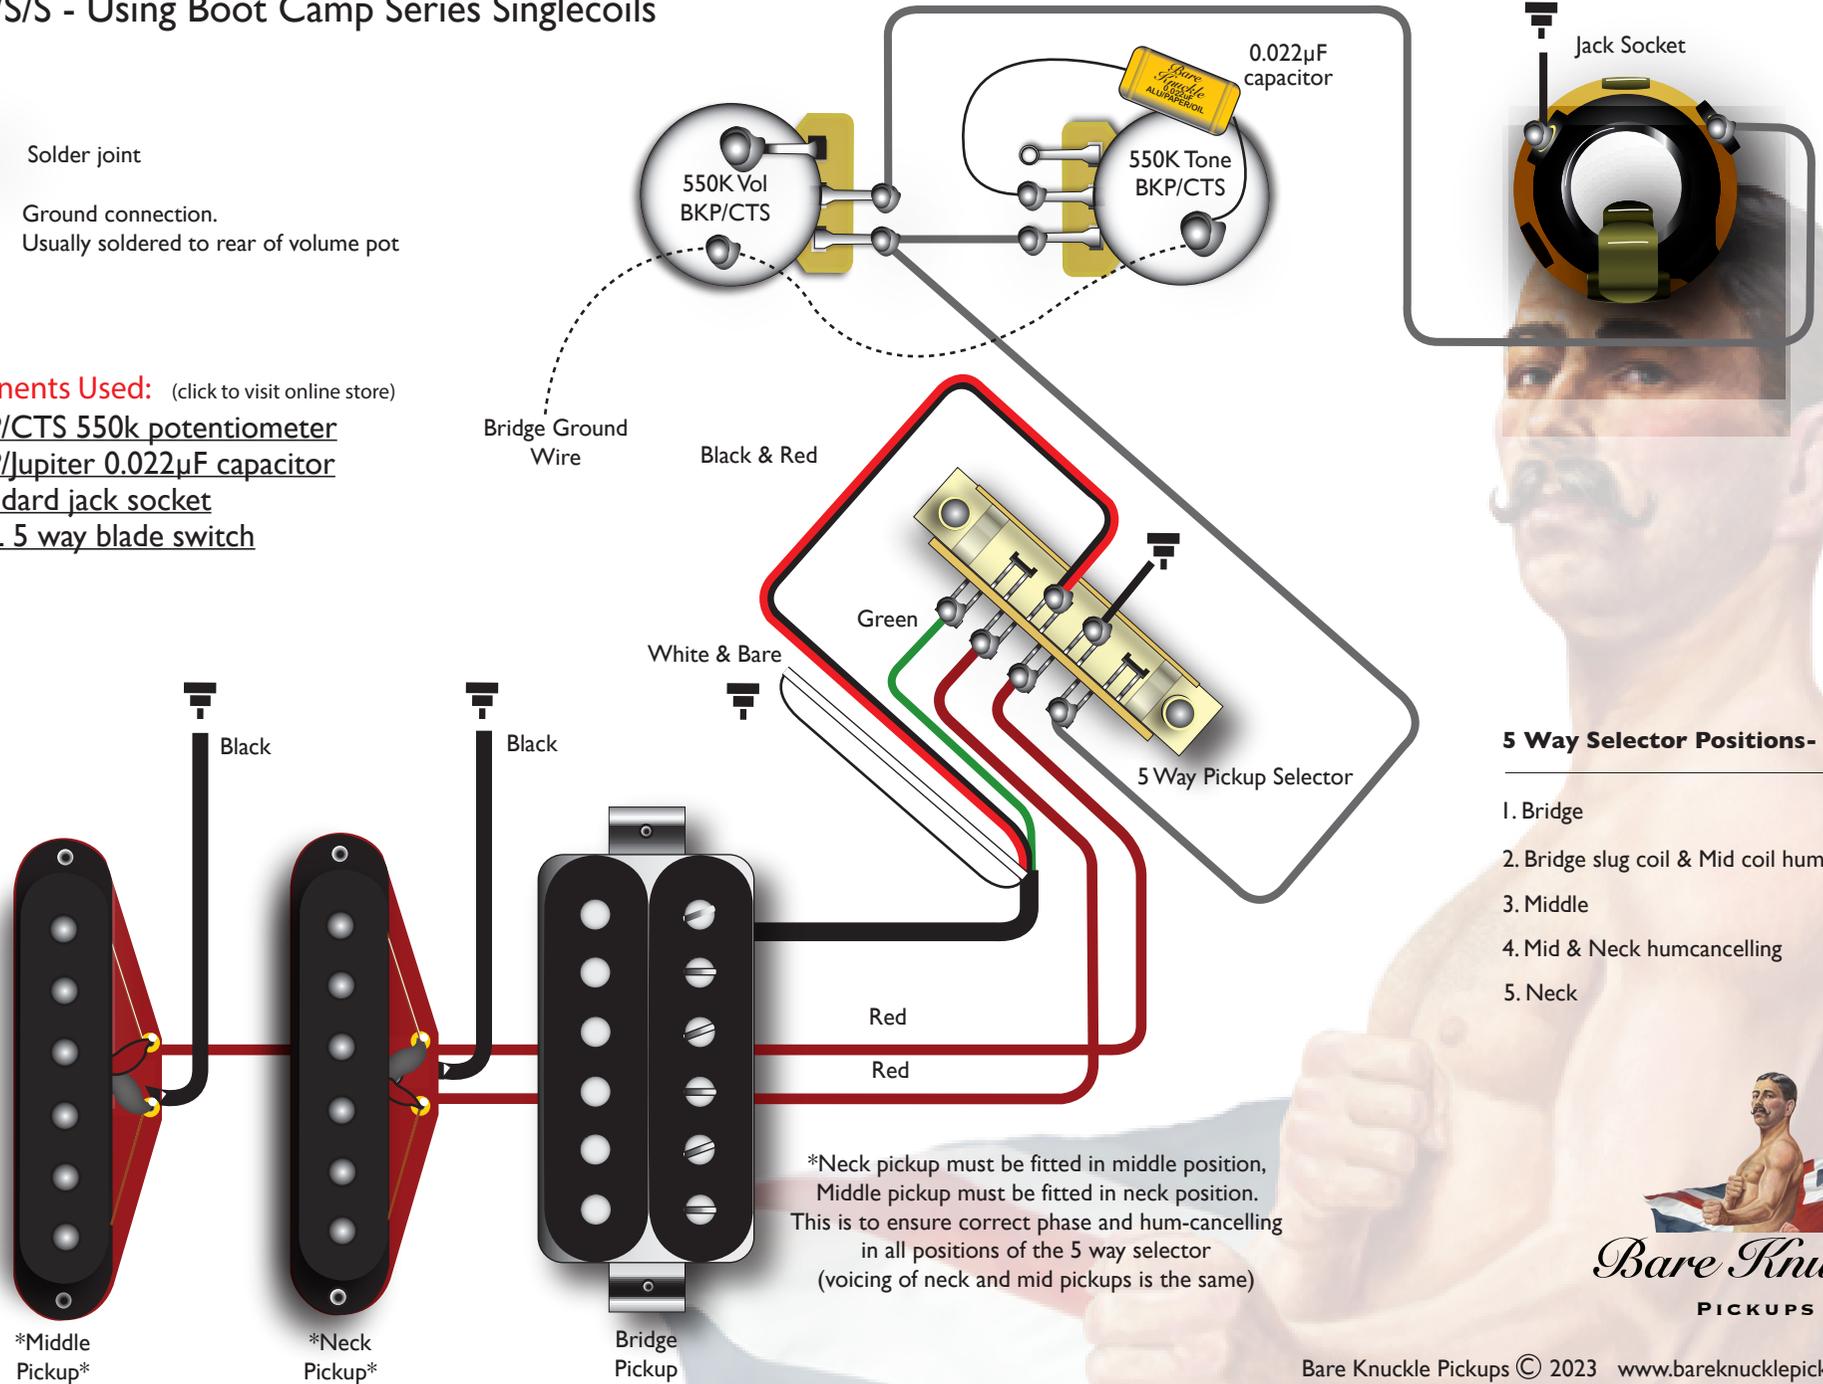

5 Way Selector Positions-

1. Bridge
2. Bridge slug coil & Mid coil humcancelling
3. Middle
4. Mid & Neck humcancelling
5. Neck

*Neck pickup must be fitted in middle position, Middle pickup must be fitted in neck position. This is to ensure correct phase and hum-cancelling in all positions of the 5 way selector (voicing of neck and mid pickups is the same)



Bare Knuckle
PICKUPS